

Physicochemical characterization and alcoholic fermentation of neem fruit pulp (*azadirachta indica*).

Sabba Gowda¹, Aboubakar^{2*}, Njintang Y. N³., Mbofung CMF⁴

¹The Higher Institute of the Sahel, University of Maroua P.O. Box 46 Maroua-Cameroon

²Faculty of Sciences University of Maroua P.O. Box 814 Maroua-Cameroon

³Faculty of Sciences University of Ngaoundere P.O. Box 454 Ngaoundere-Cameroon

⁴College of Technologies, University of Bamenda P.O. Box 49 Bambili-Cameroon

Abstract: This study is a contribution to the valorization of neem fruit pulp (*Azadirachta indica*) to produce bioethanol by the alcoholic fermentation. During this study, physical characterization of neem fruit and physicochemical neem pulp performed. Also, the variation of the concoction pH of the fermentation tests was carried out to find the ideal pH for optimal production of bioethanol by the yeast *Saccharomyces cerevisiae*. The results obtained show that the pulp represents about 48% of the total mass of neem fruit. And also reveals that the neem pulp is very rich in total sugars (74% for Makabaye and 73% for Baoliwol) and that they can be converted into the bioethanol by alcoholic fermentation. The unadjusted wort pH (pH = 5.4) resulted in a maximum bioethanol production of 5.1 mL / 100g DM in 05 days of fermentation compared to other fermentation tests (pH = 4.3, 4.5 and 4.7). Also, the distillation of the fermented concoction allowed to obtain bioethanol with an alcohol content of 85% (v / v). This study has shown that neem fruit pulp could used as an organic material rich in sugars, to the intensive production of bioethanol.

Key words: Neem pulp, physicochemical characterization, concoction, alcoholic fermentation, bioethanol.

1. Introduction:

The increasing demand of oil and the adverse effects such as the resulting climate change (Bunthita et al, 2016) have led to the search for alternative energy sources with little impact on the environment (Siti et al., 2017, Novidzro et al., 2013). Thus, the depletion of crude oil reserves and

soaring crude costs offer excellent prospects for bioethanol (Boulal et al., 2010), considered as an appropriate alternative to gasoline (Chamoumi, 2015). Bioethanol used as biofuel is mainly produced from plant reserve organs (Riess, 2012). However, the use of these reserves for the

production of bioethanol competes directly with products intended for human consumption (Maria, 2012). To solve these problems, research has focused on the valorization of inedible organic matter for the production of bioethanol. Indeed, the use of neem fruit is very interesting because its seed can produce oil and its pulp contains sugars. These sugars can be valorized by a biotechnological process for the production of a product with high added value, like bioethanol.

In Cameroon, the fight against desertification and climate change is a government concern. Faced with these challenges, neem is one of the most used trees for reforestation in the Sahelian regions (Foundoun, 1998). In March 2011, according to the Regional Delegation for the Environment and Nature Protection of the Far North, nearly 560 000 neems and Acacia plants have reforested about 1500 hectares in Léré (Mayo Department). Kani). Also, according to Tizé *et al.* (2016), about 45 500 neems trees are distributed in the city of Maroua (Cameroon). At maturity, neem produces an average of 50 kg of sweet fruit each year (Formad, 2013), whose pulp (48% of the total mass of neem fruit) remains unvalued. As a result, the neem pulp represents a significant amount of biomass, which requires energy recovery.

In order to give an added value to the fruit pulp of neem, the objective of this study is the physicochemical characterization of the neem pulp for the production of bioethanol. Specifically, it is a question of making a determination of the total sugar content of neem fruit pulp, the specific production and the alcoholic content of bioethanol obtained from the fruit pulp of neem.

2. Material and Methods:

2.1. Study area and plant material

The study was realized during the period February-March 2017 in the Far North region (Cameroon). Four sites of neem productions were selected for the collection of neem fruits: 02 sites in Mayo-Sava (Mora and Mora I) and 02 sites in the Diamaré (Makabaye and Baoliwol). Neem fruits were sorted on the basis of skin color (preferably yellow) and appearance (cool) to the touch, fallen from the tree between 24 and 48 hours. However, for the Mora I site the neem fruits were collected (yellow and firm

to the touch) and were not subject to any selection criteria beforehand.

The plant material consists of neem fruits, collected in 04 sites in the Far North region

2.2. Biological material

The biological material is the dry yeast strain *Saccharomyces cerevisiae* (Lesaffre, Turkey), used for the alcoholic fermentation of the pulp juice of neem fruits.

2.3. Methodology:

2.3.1. Physical characteristics of neem fruits

Parameters such as average weight, proportions of pulp and almonds were considered. The average weight was determined by weighing batches of 100 dried neem fruits using a scale (Compact Scale Electronic, USA). The masses of the fruit components were determined by weighing after coring (removal of the kernel) batches of 200g of dried neem fruit.

2.3.2. Process for obtaining the neem pulp powder

Neem fruits were sorted at site collection and cleaned with water (Figure 1a). The fruits were distributed on a rectangular tray, placed on the roof to capture the maximum solar radiation for an average of 3 to 4 days. The fruits are returned from time to time to accelerate and harmonize the drying the time (Figure 1b). Once this drying is complete, each fruit placed in the horizontal position is cut in half with a knife (Stainless Steel, China) and the kernel is removed. The pulp obtained was exposed to the sun for 6-8 days on average and the end of drying is observed when the pulps are firm at the finger pressure.



(a) Ripe and fresh fruits

(b) Dried fruits

Figure 1: Process of drying the neem fruits

The obtained pulps were ground with a wooden mortar until the powder is obtained and the resulted powder was sieved using a sieve of mesh equal to 500 μm , the fine powder obtained was sent to the laboratory.



(a) Dried neem pulp (b) Neem pulp powder

Figure 2: Production of the powder from the dried pulp of neem:

2.3.3. Physico-chemical characterization of neem pulp

The dry matter was determined on a mass of 5 g of neem pulp, placed in an isothermal oven at 105 ° C to a practically constant mass (AFNOR, 1982). The total ash content was determined by calcining the test portion used for the dry matter, in a high-temperature oven at 550 ± 15 ° C (AFNOR, 1982). The total lipid content determined according to the Russian method (Bourelly, 1982). The proteins were assayed according to the Devani et al. (1989) after mineralization according to the Kjeldahl method (AFNOR, 1984). Total sugars were assayed by the phenol-sulfuric method (Dubois et al., 1956).

2.3.5. Alcoholic fermentation of the juice of neem pulp

2.3.5.1. Preparation of the inoculum

The inoculum was obtained according to the protocol described by Massengo *et al.* (2016). The yeast is pre-cultured by the introduction of 06 g the dry yeast strain *Saccharomyces cerevisiae* (Lesaffre, Turkey) in 100 ml of distilled water, containing 44 ml of a solution of 12% saccharose (v / v), with continuous stirring for 90 minutes at the temperature of 27 ° C (Gauthier *et al.*, 2005).

2.3.5.2. Extraction of the neem pulp juice and preparation of the fermentation concoction

Extraction of pulp juice from neem fruit was carried out according to the adapted method of Chniti (2015). A mass of 200 g of powder was diluted with

distilled water at a 1/5 (w/v) dilution ratio is heated at 70 ° C. for 60 minutes (Chniti *et al.*, 2013), with continuous stirring. The juice is filtered using muslin after cooling. The resulting juice was heated at 85 ° C for 20 minutes to remove bacterial flora and cooled to room temperature (Diakabana *et al.*, 2013, Massengo *et al.*, 2016). The medium is enriched with urea (NH_2CONH_2 , 4g / L) to ensure optimal growth of yeasts and to accelerate the kinetics of fermentation (Novidzro *et al.*, 2013, Gbohaida *et al.*, 2016) Inoculum in the ratio Inoculum/Concoction = 1/500 (V/V) was added to the fermentation concoction, with continuous stirring.

2.3.5.3. Adjustment to different pH of the concoction of fermentation pulp

From the obtained neem pulp concoctions, 04 alcoholic fermentation tests were carried out: a test where the pH of the concoction was not adjusted (pH = 5.4) and 03 tests with the pH of the concoctions were adjusted. At 4.3, 4.5 and 4.7 with dilute sulfuric acid solution (1.5N H_2SO_4). Once the desired pH is reached for the various adjusted concoctions (4.2, 4.5, and 4.7) and unadjusted concoction, they are transferred to 1L fermentors and anaerobically conducted for 120 hours (Ameyapoh *et al.*, 2006), at a temperature of 30 ± 2 ° C (Boulal *et al.*, 2013, 2010, Kaidi and Touzi, 2001). The device of the alcoholic fermentation is presented in figure 3.

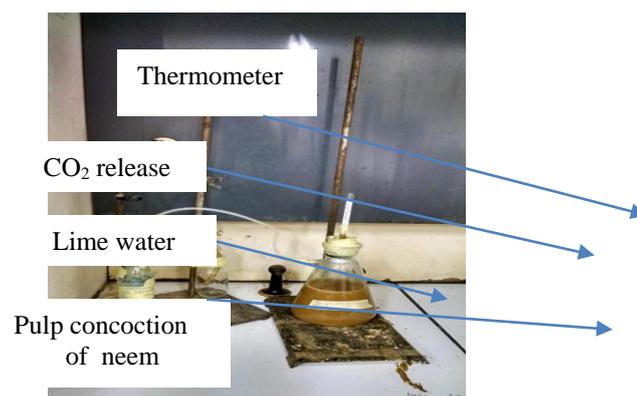


Figure 3: Dispositif de fermentation alcoolique (Labo ENSAI, Juin 2017)

The fermentation was monitored by taking ten mL with a syringe every 24 hours and for 120 hours. The controlled parameters are: the pH, the temperature and the density of the fermentation must.

At the end of the alcoholic fermentation, ethanol contained in the must is distilled off at a temperature of 78.5 ° C (Diakabana et al., 2016).

2.3.5.4. Alcohol content of the bioethanol obtained

The ethanol productivity was evaluated by directly measuring the volume of distillate obtained (after distillation) for each fermentation test. The alcoholic degree determined after the distillation of the bioethanol mixture during the distillation of the different fermentation tests. The alcoholic degree was obtained by the OIML method (1973).

2.4. Statistical analyzes

Each experiment was repeated 03 times for physicochemical analyzes of the pulp and the physical characterization of the fruit. Fermentation tests at different pHs were performed in duplicate. The results obtained were expressed in a form: $M \pm \sigma$, with σ the standard deviation and M the average. A probability $p < 5\%$ was considered as a non-significant difference in the data analysis.

3. Results and Discussion:

3.1. Physical characterization of neem fruits

The physical characteristics of neem fruits are presented in Table 1.

Table 1: Physical characteristics of neem fruits:

Sites Parameters	Makabaye	Mora	Mora I	Baoliwol
Average weight (g) ¹	260.25±2.34 ^a	238.45±2.62 ^a	240.19±0.90 ^a	264.25±0.50 ^e
Almond content (%) ²	52.45±0.34 ^b	51.35±0.34 ^b	52.15±0.34 ^b	52.21±0.54 ^b
Pulp content (%) ²	47.55±2.50 ^c	48.65±1.40 ^c	47.85±1.70 ^c	47.79±2.20 ^c

Numbers with the same superscript letters on the same line indicate that these values are not significantly different at $p < 5\%$.

3.2. Physico-chemical characterization of neem pulp

The physico-chemical characterization of neem pulp is presented in Table 2.

Table 2: Physico-chemical composition of neem pulp:

Sites Parameters	Makabaye	Mora	Mora I	Baoliwol
Dry matter content (g/100g)	90.27±0.30 ^a	87.33.30 ^a	87.67.30 ^a	89.00±0.40 ^a
Total ash (g/100g db)	06.31.13 ^m	08.10.16 ⁿ	07.57.19 ^b	07.26.69 ^b
Lipid content (g/100g DB)	03.94.18 ⁱ	05.09.49 ^c	04.84.25 ^c	05.52.08 ^j
Protein content (g/100g DB)	04.23.15 ^d	04.45.35 ^d	03.19.49 ^k	04,34.25 ^d
Total sugars (g/100g DB)	74.63±0.60 ^e	57.56±0.10 ^x	20.17±1.5 ^y	73.59±2.08 ^e

Numbers with the same superscript letters on the same line indicate that these values are not significantly different at $p < 5\%$.

3.3. Fermentation kinetics

3.3.1. pH

The consumption of carbon and nitrogen substrates is accompanied by the production of acid metabolites and ethanol. This justifies the lowering of the pH of the various musts during alcoholic fermentation, represented by Figure 4.

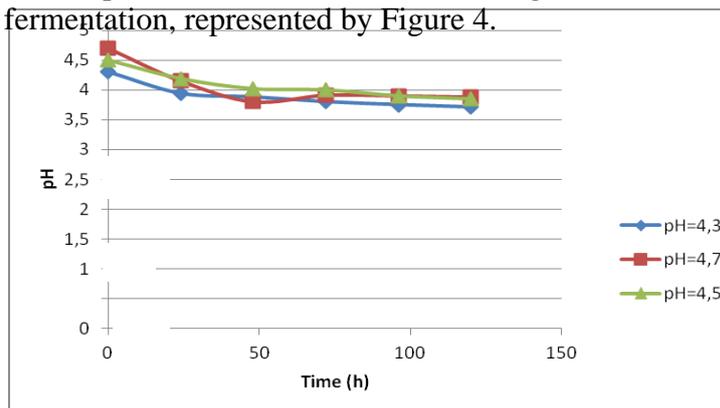


Figure 4: pH variation during alcoholic fermentation process of neem concoction:

3.2. Density of the fermented must

The decrease in density (Figure 5) is observed for the different pH values (4.3, 4.7 and 4.5), which can

be explained by the transformation of fermentable sugars into alcohol and the loss of mass under the form of CO₂ (Gaillard *et al.*, 1995).

Figure 5: Variation of must density with the time of fermentation:

3.4. Bioethanol productivity and alcohol content

The production of bioethanol for the various alcoholic fermentation tests is shown in Table 3. The lowest value was observed in pH 4.5 and while the highest was observed at pH 5.4 in the unadjusted must..

Table 3: Some physical parameters and Alcohol content of neem musts:

	pH	Alcohol content (mL/100 g de D.B)
Ajusted must	4.3 ⁱ	3.1 ^a
	4.5 ⁱ	3.0 ^a
	4.7 ⁱ	4.2 ^b
Unadjusted must	5.4 ^j	5.1 ^c

Numbers showing the same superscript letters in the same column

indicate that these values are not significantly different at $p < 5\%$.

3.5. Discussion:

The fruit pulp of neem with his high total sugar content (72-73%) is therefore an important source of bioethanol production. These levels are higher compared to the total sugar content of date must (50-60%) (Boulal *et al.*, 2013). The low production of bioethanol from neem pulp is partly due to the loss of protein and nutrients during juice filtration. Indeed, these nutrients are necessary for the growth and development of microorganisms.

Low availability of sugars can also reduce the yield of bioethanol production. However, the use of enzymes such as pectinase (Ezoua *et al.*, 1999) or pretreatment of the pulp beforehand (Alain, 2008) would make it possible to obtain significant yields

of available sugars and possibly to improve ethanol productivity. .

The high production of bioethanol at pH = 5.4 and pH = 4.7 compared to other tests (pH = 4.5 and pH = 4.3) is strongly related to the activities of the yeast *Saccharomyces cerevisiae*. The decrease in pH observed during the monitoring of fermentation tests, shows a microbial activity, source of production of acidic compounds (Ezoua *et al.*, 2008). The latter appears to have an inhibitory effect on cell growth by causing a decrease in biomass production (Giannattasio *et al.*, 2005). This may justify the low production of bioethanol at pH = 4.3 and pH = 4.5.

At the beginning of fermentation, there is a rapid decrease of the pH and a sub-sequential increase of the acidity of the various fermentation tests. This phase could correspond to the growth phase of yeasts, resulting in the production of secondary metabolites. The increase in acidity could also be due to the production of CO₂ or acidic compounds by the yeast during fermentation.

After 03 days of fermentation, pH stabilization was observed at the level of the different tests. This could correspond to the depletion of the medium in fermentescible sugars or the saturation of the media by secondary metabolites likely to inhibit yeast growth or to slow down their fermentative activity (Novidzro *et al.*, 2013). Also, Ouédraogo *et al.* (1999) showed that growth of *Saccharomyces cerevisiae* is optimal at pH = 5.

The fermentation of the different tests ends from the 3rd day while the stop is noticed on the 5th day. This observation is in agreement with that of Gbohaida *et al.* (2016).

Also, the drop in density observed for the various tests is due to a loss of material (in the form of carbon dioxide) during the alcoholic fermentation (Kouakou *et al.*, 1987) and the transformation of sugars into bioethanol (Ouédraogo *et al.*, 1999).

4. Conclusion:

Neem pulp is a very rich substrate of fermentable sugars, whose fermentative transformation is promising. This pulp represents about 48% of the total neem fruit mass, and is therefore, an important source of biomass. The physicochemical composition of neem pulp shows that total sugars

are the major components (74% for Makabaye and 73% for Baoliwol). These sugars can therefore be converted by biotechnological processes into bioethanol. In the alcoholic fermentation tests of neem pulp at different pH values (4.2, 4.5, 4.7, and 5.4), the best bioethanol production rate was observed at pH = 5, 4 (5.1 mL / 100g pulp MS) and pH = 4.7 (4.2 mL / 100g pulp MS). This study is the first to characterize neem fruit pulp and to determine its total sugar content for bioethanol recovery. Numerous perspectives stem from this present work, namely: the characterization of the sugars contained in the fruit pulp of neem and the optimization of the extraction of pulp sugars from neem fruits.

5. References :

- [1.] AFNOR (1984). Recueil de normes françaises. Produits agricoles alimentaires: directives générales pour le dosage de l'azote avec minéralisation selon la méthode de Kjeldahl. Paris (France).
- [2.] AFNOR (1982). Recueil des normes françaises des produits dérivés des fruits et légumes. Jus de fruits. 1ère éd., Paris (France).
- [3.] ALAIN D. (2008). La Biomasse Energie: Définition, Ressources et Usages. Dunod, Paris, 247 p.
- [4.] AMEYAPOH Y., K. WOKPOR et C. SOUZA (2006). Identification et sélection des sou-ches de levures performantes pour la production d'alcool. *Journal des Sciences*, 6 (1), 11 p.
- [5.] BOULAL A., B. BENALI, M. MOULAI et A. TOUZI (2010). Transformation des déchets de dattes de la région d'Adrar en bioéthanol. *Revue des Energies Renouvelables*, 13 (3), pp. 455-463.
- [6.] BOULAL A., Z. BENBRAHIM, B. BENALI et S. LADJEL (2013). Etude comparative de rendement de la production d'éthanol de deux variétés de dattes communes de faible valeur commerciale (Tinaceur et Aghmou) de Sud-Ouest de l'Algérie. *Revue des Energies Renouvelables*, 16 (3), pp. 75-78.
- [7.] BOURELY J. (1982). Observation sur le dosage de l'huile des graines de cotonnier. *Coton et Fibres Tropicales*, 27 (2), pp. 183-196.
- [8.] BUNTHITA P., P. AGGARANGSI, T. CHAIYASO and N. CHANDE (2016). Potential of fermentable sugar production from Napier cv. Pakchong 1 grass residue as a substrate to produce bioethanol. *Energy Procedia*, vol. 89, pp. 428-436.
- [9.] CHAMOUMI M. (2013). Optimisation de la production du biodiesel à partir d'huiles des mi-croalgues et d'huiles usées. Maitrise en Environnement, Université de Sherbrooke (Québec, Canada), 101 p.
- [10.] CHNITI S., H. DJELAL, I. BENTAHAR, M. HASSOUNA et A. AMRANE (2013). Optimisation de l'extraction des jus des sous produits des dattes (*Phoenix dactylephera L.*) et valorisation par production de bioéthanol. *Conférence Internationale des Energies Renouvelables (CIER'13)*, Sousse, Tunisie, 7 p.
- [11.] CHNITI S. (2015). Optimisation de la bioproduction d'éthanol par valorisation des refus de l'industrie de conditionnement des dattes: Thèse de Doctorat en Sciences de la Matière, Université Rennes 1, 211 p.
- [12.] DEVANI MB., SHISHOO J., SHAL S. and N. SUHAGIA (1989). Spectrophotometrical method for determination of nitrogen in Kjeldahl digest. *Journal of AOAC*, vol. 72, pp. 953-956.
- [13.] DIAKABANA P., SC.KOBAWILA, V. MASSENGO et D. LOUEMBE (2013). Effet du degré de maturation sur la cinétique de fermentation éthylique de la pulpe de mangue cultivar Boko. *Cameroon Journal of Experimental Biology*, 9 (1), pp. 1-8.
- [14.] DUBOIS M., KA. GILLES, JK. HAMILTON, PA. REBEERS and F. SMITH (1956). Calorimetric method for determination of sugars and related substances. *Analytical Chemistry*, vol. 28, p. 350-356.
- [15.] EZOUA P., D. KOUAME and GN. AGBO (1999). Characteristics of juice from fresh fruit pulp of palmyrah palm (*Borassus aethiopicum mart.*). *Cahiers d'Agricultures*, n° 8, p. 126-128.
- [16.] EZOUA P., H. BIEGO, D. KOUAME et GN. AGBO (2008). Détermination de la composition en sucres, alcools et évolution des paramètres physico-chimiques au cours

- de la conservation du jus de fruit de rônier (*Borassus Aethiopium Mart. Arecaceae*). *Journal of Sciences Pharmaceutical Biology*, 9 (1), pp. 44-56.
- [17.] FORMAD Environnement (2013). Le Margousier ou neem.
- [18.] FOUNDOUN JM. (1998). Situation des Ressources Génétiques Forestières du Nord-Cameroun. Atelier Sous Régional FAO/IPGRI/ICRAF sur la conservation, la gestion, l'utili-sation durable des ressources génétiques forestières dans la zone sahélienne. Ouagadougou, 22-24 Septembre 1998, 28 p.
- [19.] GAILLARD GL., H. LECLERC et M. SIMONET (1995). Microbiologie Générale. Edition Doing, Paris, 535 p.
- [20.] GAUTHIER M., R. TREMBLAY et M. DESLAURIERS (2005). Contrôle du procédé de fermentation alcoolique. Institut de technologie Agroalimentaire-Québec (Canada).
- [21.] GBOHAIDA V., I. MOSSI, ES. ADJOU, CP. AGBANGNAN, DV. WOFFO, F. AVLESSI et CK. SOHOUNHLOUE (2016). Evaluation du pouvoir fermentaire de *Saccharomyces cerevisiae* et de *S. carlbergensis* dans la production du bioéthanol à partir du jus de la pomme Cajou. *Journal of Applied Biosciences*, n°101, p. 9643-9652.
- [22.] GIANNATTASIO S., GUARAGNELLA N., CORTE-REAL M., PASSARELLA S. and E. MARRA (2005). Acid stress adaptation protects *Saccharomyces cerevisiae* from acedid induced programmed cell death. *Gene*, vol. 354, 93-98.
- [23.] KAIDI F. et A. TOUZI (2001). Production de bioalcool à partir des déchets des dattes. *Revue des Energies Renouvelables: Production et valorisation Biomasse*, pp. 75-78.
- [24.] KOUAKOU A., AGBOU NG. et AF. YEBOUA (1987). Fermentation alcoolique du jus d'ananas: étude comparative de l'influence de la température. *Journal of Fermentation Technology Biology*, vol. 4, pp. 13-25.
- [25.] MARIA DP. (2014). Production du biodiesel à partir de l'huile modèle de mi-croalgues par voie de catalyse enzymatique hétérogène. Mémoire de Maitrise en Génie Chimique, Université se Sherbrooke (Québec, Canada), 82 p.
- [26.] MASSENGO V., BW. LOUMOUAMOU, P. DIAKABANA and T. SILOU (2014). Ethanol production by fermentation of the pulp of the "Boko" mango. *International Journal of Chemical Sciences and Technology*, 4 (4), p. 71-77.
- [27.] NOVIDZRO KM., KA. AGBODAN et KH. KOUMAGLO (2013). Etude de la performance de quatre souches de *Saccharomyces cerevisiae* au cours de la production d'éthanol à partir des moûts de sucrose enrichis. *Journal de la Société Ouest Africaine de Chimie*, (035), p. 1-7.
- [28.] OIML (1973). Alcoométrie: Tables alcoométriques internationales. Quatrième Conférences Internationales de Métrologie Légale, BIML, 75009 Paris, France.
- [29.] OUEDRAOGO N., SAVADOGO A., SOMDA MK., C. ZONGO et A. TRAORE (2012). Essai de production de protéines d'organismes unicellulaires par des souches de levures à partir de résidus de tubercules de patate douce et d'igname. *Biotechnology Agronomy Society and Environment*, 16 (4), pp. 463-467.
- [30.] RIESS J. (2009). Intensification de la brique "fermentation alcoolique" de substrats betteraviers (et autres substrats) pour la production d'éthanol, Université de Toulouse, 178 p.
- [31.] SITI H. MA., R. ABDULLA, SA. JAMBO, H. MARBOWI, JA. GANSAU, AAM. FAIK, and KF. RODRIGUES (2017). Yeasts in sustainable bioethanol production: A review. *Biochemistry and Biophysics Reports*, 2017 (10), pp. 52-61.
- [32.] TIZE KJ., SINBAI M., DR. DJOULDE and A. NGAKOU (2016). Assessment of biofuel potential of dead neem leaves (*Azadirachta indica*) biomass in Maroua town, Cameroon. *African Journal of Biotechnology*. 15 (34), pp. 1835-1840.